

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



BA


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>F16G 11/14, F16K 35/06</b>		<b>A1</b>	(11) International Publication Number: <b>WO 97/04247</b>
			(43) International Publication Date: 6 February 1997 (06.02.97)
(21) International Application Number: <b>PCT/GB96/01723</b>		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: <b>19 July 1996 (19.07.96)</b>			
(30) Priority Data: 9515073.6      22 July 1995 (22.07.95)      GB			
(71)(72) Applicant and Inventor: BLAIR, Neil [GB/GB]; 3 North Street, Fleetwood, Lancashire FY7 6AZ (GB).			
(74) Agents: BRIERLEY, Anthony, Paul et al.; Appleyard Lees, 15 Clare Road, Halifax, West Yorkshire HX1 2HY (GB).		Published With international search report.	

(54) Title: SECUREMENT DEVICE AND METHOD

(57) Abstract

A securement device comprises a base (2) arranged to receive a top (4) so that a length of wire (6) can be clamped therebetween in order to define a looped configuration. Clamping of the base and top is achieved by means of a threaded stud or bolt fixed relative to the base which is received within a nut fixed relative to the top. Release of the top from the base is restricted by a lock which extends through aligned openings (10, 20) in the base and top. In use, the length of wire (6) may be wrapped around an operating member of a valve and secured in position using the device.

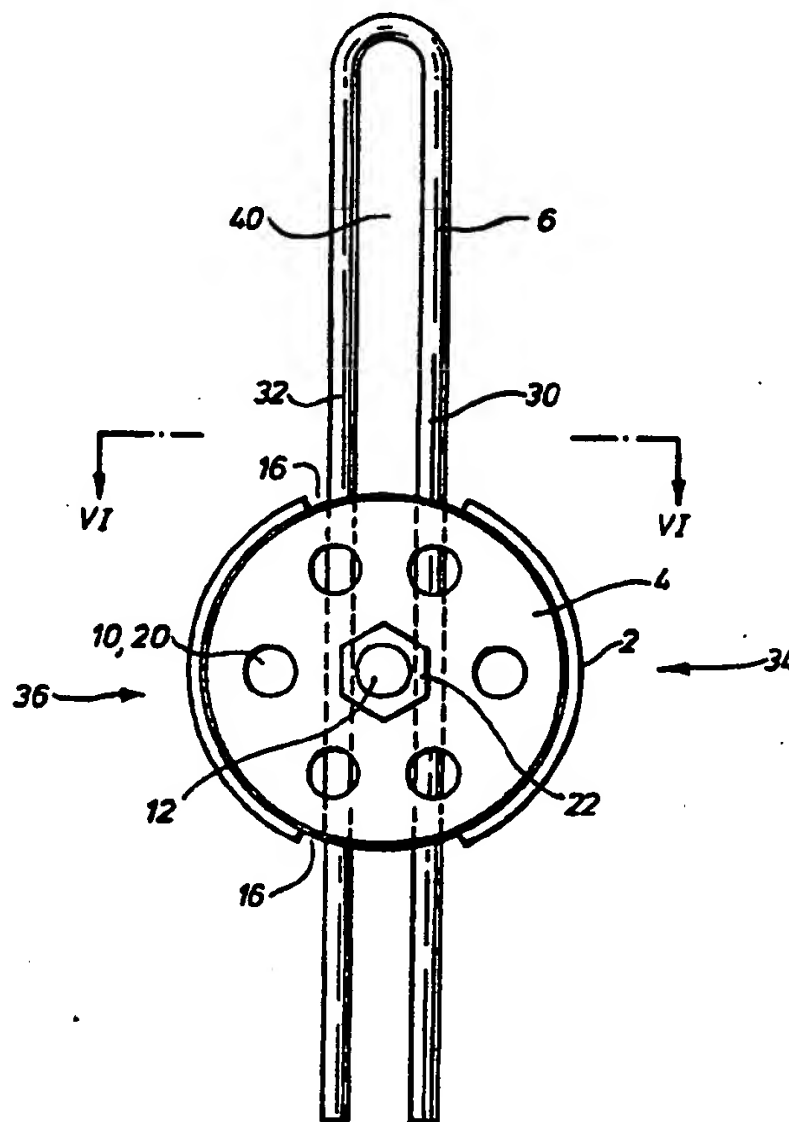

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

- 1 -

SECUREMENT DEVICE AND METHOD

This invention relates to a securement device and a method and particularly, although not exclusively, relates to a securement device for and a method of securing an elongate flexible member in a looped configuration. The device and method may be used for locking a valve in a closed or open position.

10 In chemical plants or on oil or gas rigs, it is often necessary to secure fluid control valves in closed or open positions thereby preventing them from being inadvertently moved.

15 One way of securing a valve in an open or closed position comprises extending a chain around the valve housing and an operating member of the valve and then securing the chain in position by means of a padlock. However, chains are difficult to store without becoming  
20 tangled and, due to their heaviness, it is difficult for an operator to carry a large number of chains when it is desired to secure a number of valves. Also, large valves may need to be secured by more than one chain and, therefore, chains must be secured together which adds to  
25 the difficulties. Additionally, padlocks are expensive and can be severely affected by hostile environments. Furthermore, keys to padlocks can be lost in which case the chain secured thereby must be cut through to release the valve. In this event, the chain cannot be re-used.

30

It is also known to use plastic or wire "tie wraps" to secure valves in position. Such tie wraps comprise an elongate length of serrated plastic or wire which has a securement element in which an opening is defined at one  
35 end. The securement element includes ratchet teeth which

- 2 -

are arranged such that, when the free end of the length of plastic/wire is pushed into the opening, it can be extended further thereinto but not released therefrom. Thus, the wrap can be tightened around a valve but cannot be released. Therefore, it must be cut to release and it cannot be re-used.

It is an object of the present invention to address problems associated with known securement devices and methods

According to the invention, there is provided a method of securing an elongate flexible member in a looped configuration, the method comprising clamping juxtaposed portions of the flexible member in order to fix their relative positions.

Preferably, the method is for securing an elongate flexible member in position to secure a valve in a desired position, for example a closed or open position. The elongate flexible member may be arranged to be wrapped around a valve for securing it in the desired position.

Said elongate flexible member is preferably arranged to be stored in a coiled stated, for example by being provided on a roll or spool. In the method, a length of flexible member may be removed from the roll or spool, detached from the remainder on the roll or spool and arranged in position around a valve. Said elongate flexible member may be made out of plastics or metal. Most preferably it is made of metal. For example, it may be steel wire.

The method preferably uses a securement device which is arranged to be releasably secured to the flexible

- 3 -

member. The method may include the step of engaging the device with the flexible member so that the device is slidable along the flexible member, for example the flexible member may extend within an opening in the device; positioning the device in a desired position along the flexible member; and securing the device in order to fix its position relative to the flexible member.

The device preferably includes an opening which opens in a first direction. In the method, the flexible member is preferably engaged with the device by moving the flexible member in a direction laterally to the first direction. In the method, a first part of said flexible member is preferably moved in an opposite direction to a second part of said flexible member but both parts are preferably moved laterally as described.

The invention extends to a securement device for securing an elongate flexible member in a looped configuration, the device including first and second clamp members that are movable relative to one another for applying a clamping force to the flexible member for securing it in position.

The device is preferably for use in the method described herein.

The device is preferably arranged to releasably secure an elongate flexible member in a looped configuration. The device is preferably arranged to secure first and second parts of the flexible member in position; preferably in a position wherein the parts extend substantially parallel to one another and are preferably laterally spaced apart.

- 4 -

The device is preferably arranged to apply an adjustable clamping force to the flexible members.

Preferably, the first clamp member and the second  
5 clamp member are together arranged to define an opening  
arranged to receive the flexible member. Preferably, the  
device includes first and second openings which are  
preferably arranged on opposite sides of a centre of the  
device. In one embodiment, said first and second openings  
10 are diametrically spaced apart. Preferably, the first  
member includes the or each said opening, for example one  
or more slots and said second member is arranged to close  
the opening(s).

15 Said first clamp member preferably includes an  
opening for receiving said second clamp member.

Said first and second members are preferably  
securable to one another, for example by co-operable male  
20 and female parts. Said co-operable parts preferably  
comprise a screw-threaded shaft arranged to co-operate  
with an internally screw-threaded part. Said first member  
preferably includes said male part. In one embodiment,  
said male part may comprise a stud. In another embodiment,  
25 said male part may comprise a bolt. Means is preferably  
provided for restricting rotation of the bolt relative to  
other parts of said first member. Preferably, a head of  
said bolt may be restricted from rotation by being  
received in an opening having a diameter which is less  
30 than the maximum diameter of the head. For example, the  
head may be hexagonal and it may be received in a  
hexagonal opening.

Said first and second members preferably include  
35 alignable openings through which a locking part of a lock

- 5 -

may be extended for locking the first and second parts to one another.

5        Tamper evident seal means may be provided and arranged to indicate if the first and second parts have been released. Said tamper evident seal means may be arranged to be associated with aligned openings of said first and second parts.

10       The invention extends to an assembly which comprises a securement device as described above securing an elongate flexible member in a looped configuration.

15       The elongate flexible member of the assembly is preferably secured to a valve for securing it in a closed or open position.

20       Specific embodiments of the invention will now be described, by way of example, with reference to the accompanying diagrammatic drawings, in which:

Figure 1 is a perspective view of a base of a securement device;

25       Figure 2 is a top plan view of the base of figure 1;

Figure 3 is a perspective view of a top of the securement device;

30       Figure 4 is a top plan view of the top of figure 3;

Figure 5 is a top plan view of the securement device, in use;

- 6 -

Figure 6 is a cross-section along line VI - VI of figure 5;

Figure 7 is a perspective view of a top of an alternative securement device;

Figure 8 is a perspective view from above of a bottom of the alternative securement device;

10 Figure 9 is a perspective view from below of the bottom of the alternative securement device together with a bolt; and

15 Figure 10 is a vertical cross-section through the device of figure 9.

In the figures, the same or similar parts are annotated with the same reference numerals.

20 The securement device comprises a base 2 and a top 4 that are arranged to be releasably secured together for securing a length of wire 6 in a looped configuration.

25 The base 2 of the securement device includes a circular cross-section planar part 8 in which diametrically spaced apertures 10 are defined. A threaded shaft 12 extends upwardly from the centre of planar part 8. Arcuate wall sections 14 extend upwardly from the planar part 8 and are arranged to define diametrically spaced apart openings 16.

30 The top 4 of the securement device comprises a circular cross-section planar part 18 in which apertures 20 are defined. A nut 22 is secured to the centre of an



- 7 -

upper wall of the planar part 18 around a circular opening therein.

5 The top 2 and base 4 of the securement device are arranged so that the nut 22 can be engaged with and screwed down the shaft 12 so that the planar part 18 of the top can fit snugly within the base 2, between its walls 14.

10 The device may be used as follows:

Initially, a length of steel wire is wrapped around a valve in order to secure it in an open or closed position, as desired. Then, with the top 2 and base 4 of the securement device loosely secured together by means of  
15 nut 22 engaging threaded shaft 12, the legs 30, 32 of wire 6 are engaged with the device, by moving the legs in the direction of respective arrows 34, 36 through a gap defined between the top 2 and base 4, until the legs 30,  
20 32 are received in openings 16 on opposite sides of the shaft 22. Next, the device may be slid along the wire to adjust the size of loop 40 as may be required to tighten the wire around the valve. When suitably arranged, the nut 2 may be rotated so as to move top 2 down the shaft 12,  
25 thereby to clamp the legs 30, 32 of wire securely between respective planar parts 8 and 18 of the base 2 and top 4.

The base 2 and top 4 may be locked in position by aligning selected openings 20 in the top with openings 10  
30 in the base and then engaging a padlock with one or both pairs of aligned openings. Alternatively, or additionally, a security seal may be arranged within aligned openings so that any tampering with the device, for example, any attempt to release the device, will be evident.

- 8 -

The device may easily be released by an authorised person so as to allow the wire to be re-used.

5 It should be noted that the wire 6 is easily engaged with the device by moving legs 30, 32 laterally to the diameter which extend through the openings 8. Ends of the wire need not be threaded through any openings and, therefore, there is no detriment in the event that the free ends of the wire are frayed or otherwise deformed.

10

It should also be noted that use of the device is relatively easy. An operator can simply be provided with a roll of steel wire, a number of devices and a means for cutting the wire. There is little likelihood of the wire becoming tangled or otherwise rendered difficult to use.

15

In one embodiment, an operator may position a tag over the shaft 12 prior to engagement with the top 4. The tag may carry important information relating to the use of the valve. Thus, the device may provide a convenient way of securing such a tag in position.

20

The alternative securement device shown in figures 7 to 10 comprises a top 50 which is similar to the top 4 of figures 3 and 4, except that it includes additional apertures 20, and a base 51. The base 51 includes a hexagonal cross-section downwardly open housing 52 which surrounds a circular opening 54 in wall 56 of the base. The housing 52 is arranged to receive a standard M8 bolt 58 so that head 60 of the bolt is snugly received in the housing and cannot be rotated therewithin. The bolt 58 is held in position by means of a star-clip which is seated in a recess 62 defined in wall 56. Shank 60 of the bolt 58 extends away from wall 56 of the base and is co-operable with nut 22 on the top 50.

25

30

35

- 9 -

Wall 62 of the base includes aligned pairs of openings 64, 66 between which 3mm wide parallel semi-circular cross-section grooves 68 are defined in wall 56. The openings and grooves are arranged to receive  
5 respective legs of wire. Advantageously, the grooves 68 are ridged (or otherwise provided with non-smooth friction surfaces) for aiding the securement of the wire in position.

10 The device of figures 7 to 10 is used generally as described above for the figures 1 to 6 embodiment.

The devices may be manufactured out of plastics or metal or a combination of both. In any event, the devices  
15 can be cheaply manufactured and in combination with cheap and readily available steel wire, provides a cheap means of securing valves or any other similar components in a desired configuration.

20 The reader's attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and  
25 documents are incorporated herein by reference.

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or  
30 process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification  
35 (including any accompanying claims, abstract and

- 10 -

drawings), may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of  
5 a generic series of equivalent or similar features.

The invention is not restricted to the details of the foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features  
10 disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

- 11 -

CLAIMS

1. A method of securing an elongate flexible member in a looped configuration, the method comprising clamping juxtaposed portions of the flexible member in order to fix their relative positions.
2. A method according to Claim 1, for securing an elongate flexible member in position to secure a valve in a desired position.
3. A method according to Claim 1 or Claim 2, wherein the elongate flexible member is arranged to be wrapped around a valve for securing it in the desired position.
4. A method according to any preceding claim, including the step of engaging a securement device with the flexible member so that the securement device is slidable along the flexible member; positioning the securement device in a desired position along the flexible member; and securing the securement device in order to fix its position relative to the flexible member.
5. A securement device for securing an elongate flexible member in a looped configuration, the device including first and second clamp members that are movable relative to one another for applying a clamping force to the flexible member for securing it in position.
6. A device according to Claim 5, which is arranged to secure first and second parts of the flexible member in position.
7. A device according to Claim 5 or Claim 6, wherein the first clamp member and the second clamp member are

- 12 -

together arranged to define an opening arranged to receive the flexible member.

8. A device according to any of Claims 5 to 7, wherein  
5 said first and second members are securable to one another by co-operable male and female parts.

9. A device according to any of Claims 5 to 8, wherein  
10 said first and second members include alignable openings through which a locking part of a lock may be extended for locking the first and second members to one another.

10. A device according to any of Claims 5 to 9, wherein  
15 tamper evident seal means is arranged to indicate if the first and second members have been released.

11. An assembly which comprises a securement device  
according to any of Claims 5 to 10 securing an elongate  
flexible member in a looped configuration.

20

12. An assembly according to Claim 11, wherein said  
elongate flexible member of the assembly is secured to a  
valve for securing it in a closed or open position.

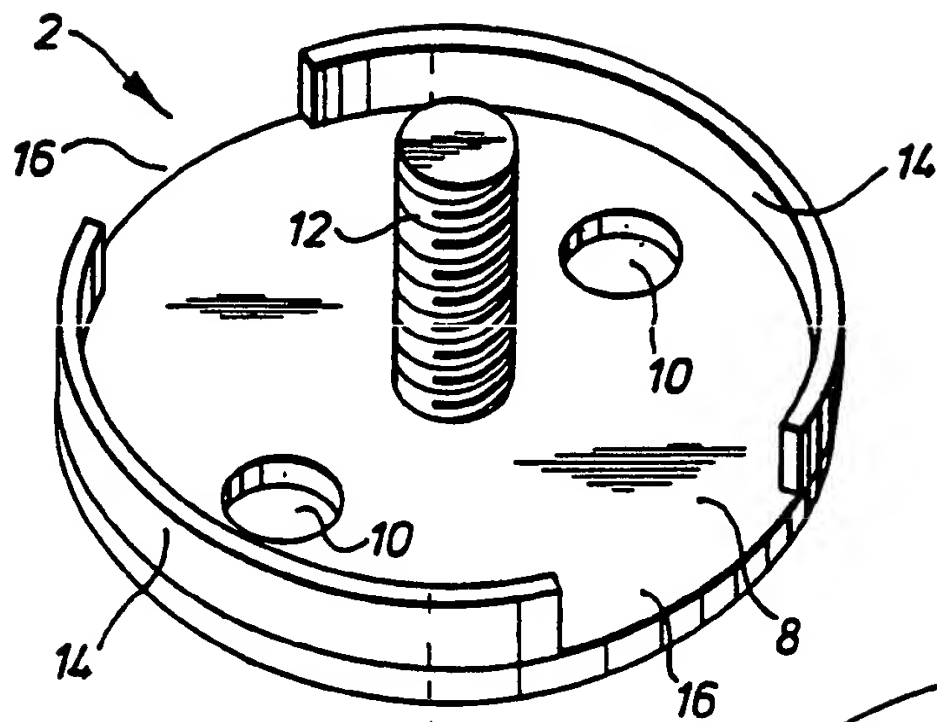


Fig.1.

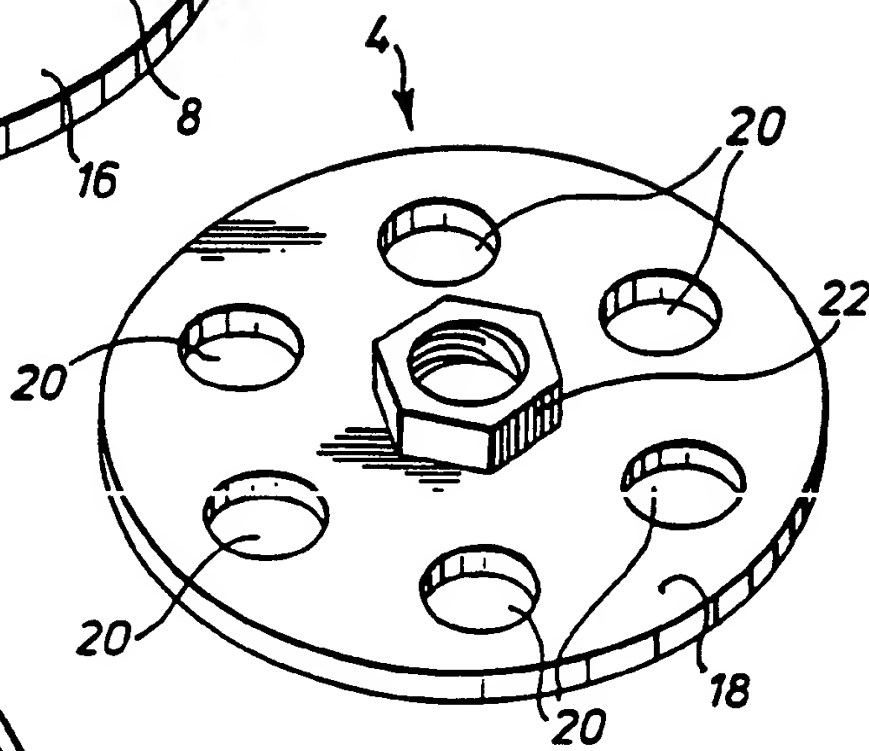


Fig.3.

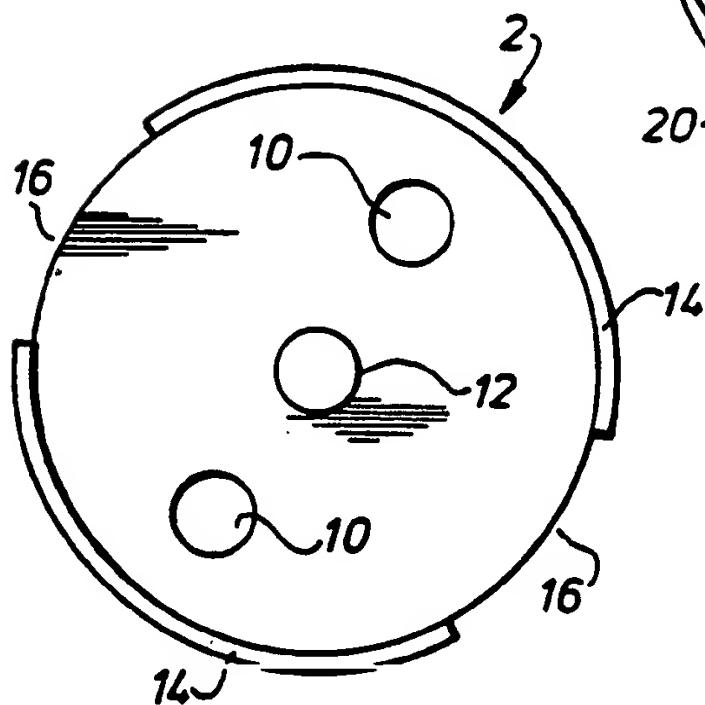


Fig.2.



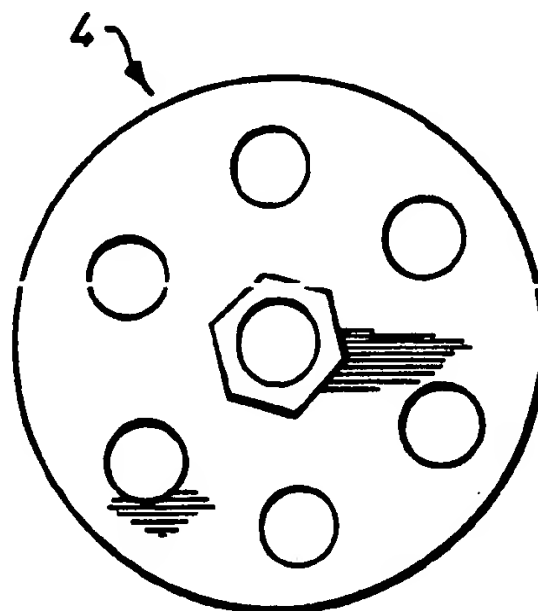


Fig.4.

2/3

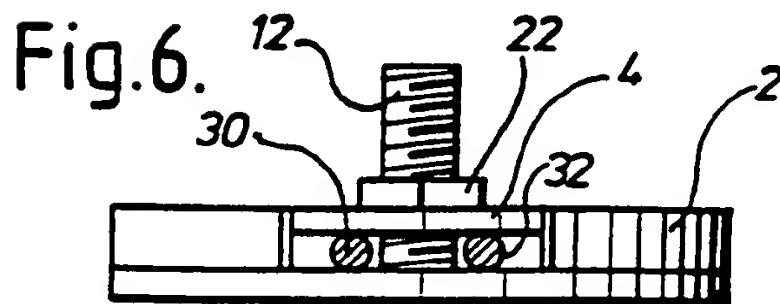

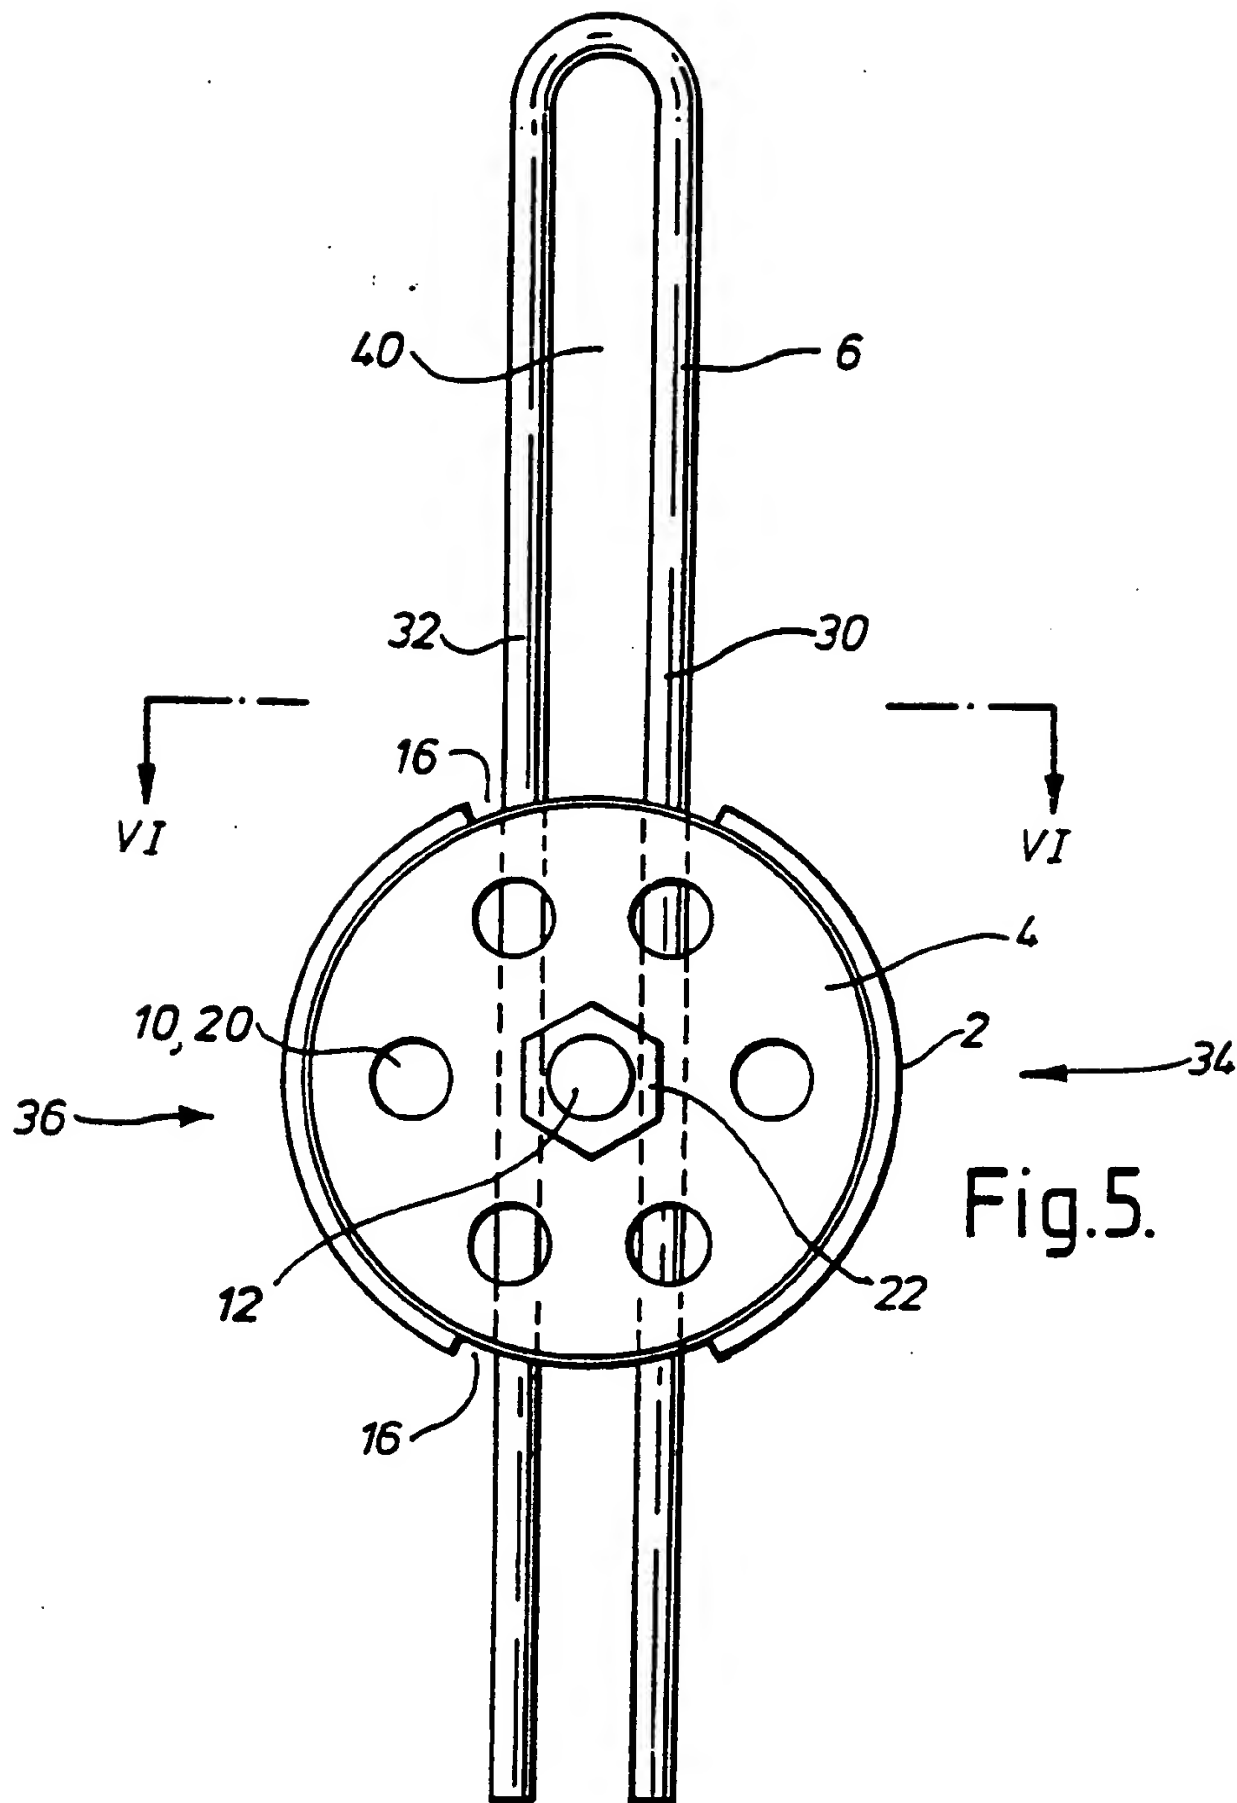

3/3

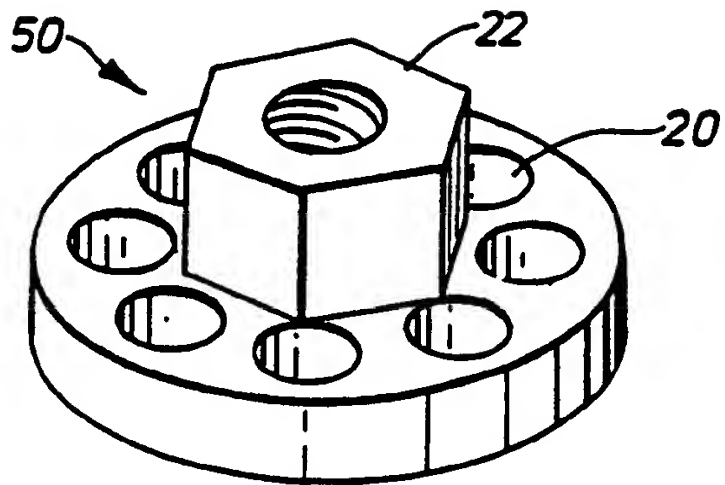


Fig. 7.

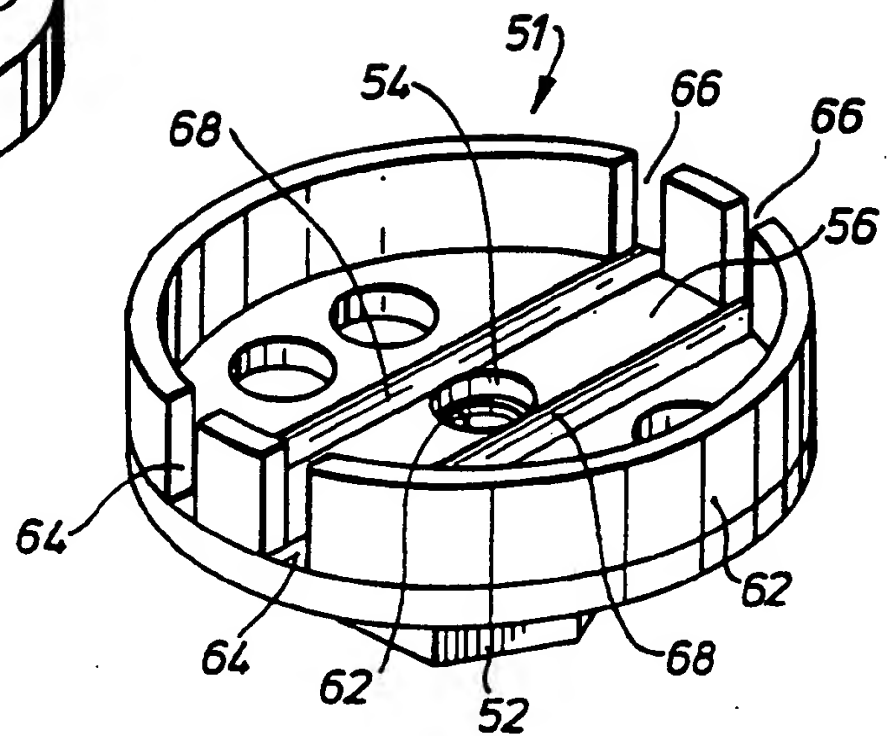


Fig. 8.

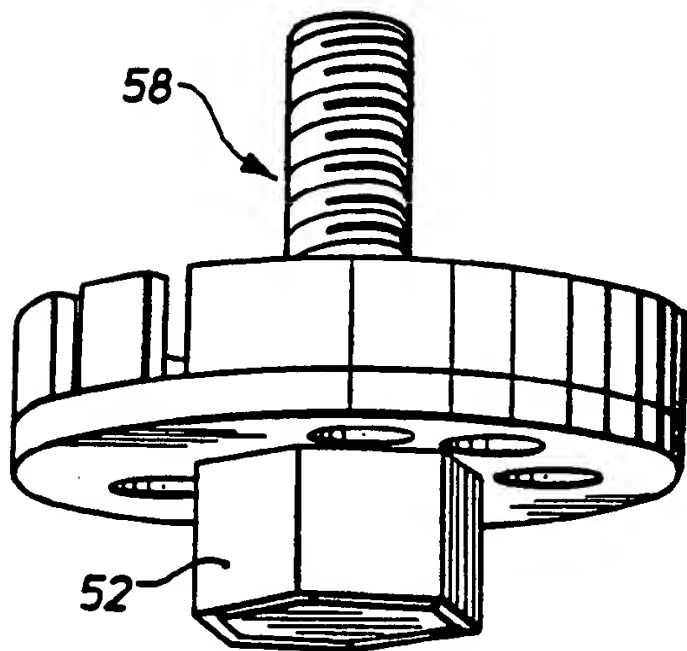


Fig. 9.

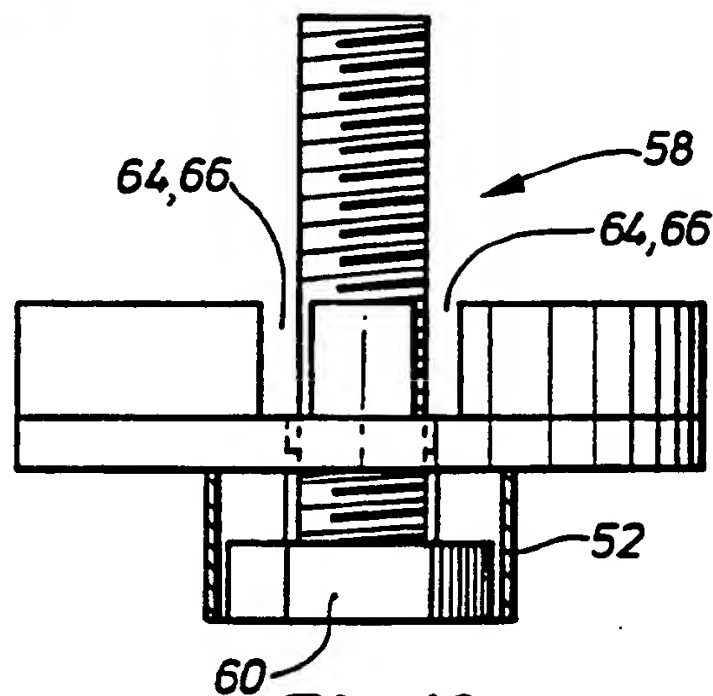


Fig. 10.

# INTERNATIONAL SEARCH REPORT

Int. onal Application No  
PCT/GB 96/01723

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 F16G11/14 F16K35/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 F16K F16G F16B F16L F21V		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE,A,31 07 433 (HUCK MANFRED) 16 September 1982	1,5-8,11
Y	see page 6, paragraph 2 see claims 1-3,7 see figures 1,2	3,9,12
Y	FR,A,2 528 938 (PEREIRA MANUEL) 23 December 1983 see page 1, paragraph 1 see page 2, line 12 - line 35 see page 3, line 4 - line 14 see claims 1,4 see figure 1	3,9,12
A	DE,U,94 01 703 (MACRIFIN S P A) 19 May 1994 see page 6, line 23 - page 7, line 12	10
<div style="display: flex; justify-content: space-between;"> <span><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input checked="" type="checkbox"/> Patent family members are listed in annex.</span> </div>		
* Special categories of cited documents : <div style="display: flex;"> <div style="flex: 1;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search  10 October 1996		Date of mailing of the international search report  24. 10. 96
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer  Schaeffler, C

INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/GB 96/01723

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,34 37 089 (CULLMANN HANDEL) 17 April 1986	
	---	
A	EP,A,0 347 289 (MECAFRANCE SA) 20 December 1989	
	-----	

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/GB 96/01723

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-3107433	16-09-82	NONE	
FR-A-2528938	23-12-83	NONE	
DE-U-9401703	19-05-94	NONE	
DE-A-3437089	17-04-86	NONE	
EP-A-0347289	20-12-89	FR-A- 2633028	22-12-89